
360° MAGIC COLOR NEON LED FLEX SPECIFICATIONS


>> PRODUCT CHARACTER




| TTK-D18 | |
|--|--|
| 360° | |
| 18mm | |
| SMD2835 | |
| TM1934/WS2811 | |
| DC12V/DC24V | |
| 10W/Meter | |
| 72D/m | |
| -20~50°C | |
| IP67 | |
| magic color | |
| Architectural contour lighting,KTV,Ceiling | |
| | |


>> PRODUCT FEATURES











Luminous layer














>> BUCKLE INSTALLATION MODE




1)Prepare the screws and pc clips.



2)Adjust the pc clips to the proper position and use a screwdriver to drive the screw to secure it.




3)Open the pc clip, and put the lamp strip in a fixed position.



4)Installation completed




If the length of LED strip is over 2m, it is recommended to install by two persons.

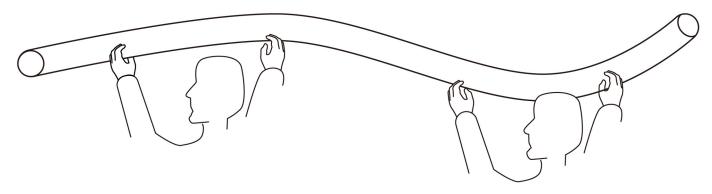


>> FEATURES

- (1) Light source: High luminous efficiency
- (2) Professional structure design, uniform light, soft light, color temperature consistency.
- (3) Multiple modes switch to create different atmosphere effects
- (4) Increased durability: Fabric wrap can be bent to reduce the risk of breakage and other adaptations to a variety of environments.
- (5) Good softness, easy bending, easy modeling, tensile resistance.
- (6) Product Certification: CE、ROHS.
- (7) 2 years warranty, life span over 36000 hours.

>> INSTALLATION AND ACCESSORIES

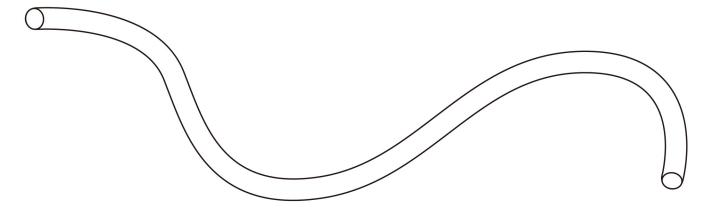

>> WIRING DIAGRAM

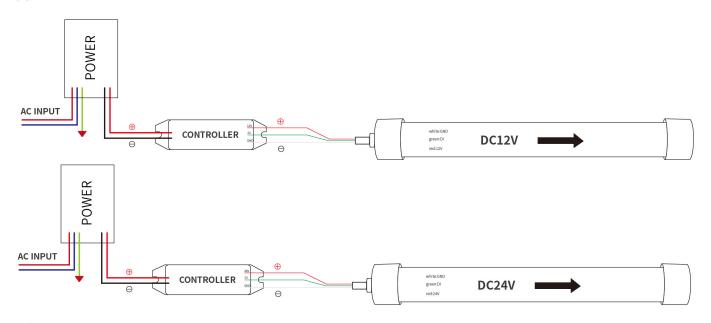

>> ACCESSORY INFORMATION

| Name | Description | Imgae | Sectional size | Net weight per box (kg) |
|------------------------------|---|--|----------------|-------------------------|
| end caps | Neon tube accessories | | 18mm | 0.01kg |
| Round PC clips | Fixed installation | | | 0.01kg |
| SP611E wifi controller | LED Controller Bluotooth & IR 8 Muslc For addressable LED | 99111101011111111111111111111111111111 | | 0.03kg |

>> APPLICATION

Architectural contour lighting,KTV,Ceiling







>> NOTE & WARNING

- ▲ In order to be able to better achieve the luminous effect of products, each 5 meters or 10 meters long lamp with a power connecting.
- ▲ In order to ensure the lamp with long service life and the environment, can not force pulling the power line in these process, no collision so as not to damage the LED lamp.
- ▲ In order to ensure the lamp with life and reliability, please don't in the 60mm below diameter arc bending, not half so as not to damage the lamp or broken.
- ▲ Try to install the appropriate environment.
- ▲ Please note that careful operation, in the case of power on, don't hit the ac power, avoid shock.

>> PACKAGING

